


PART No.	SAP-0671D	SPECIFICATIONS
PRODUCT	C.D.I	

Final Product	Connection Details
---------------	--------------------

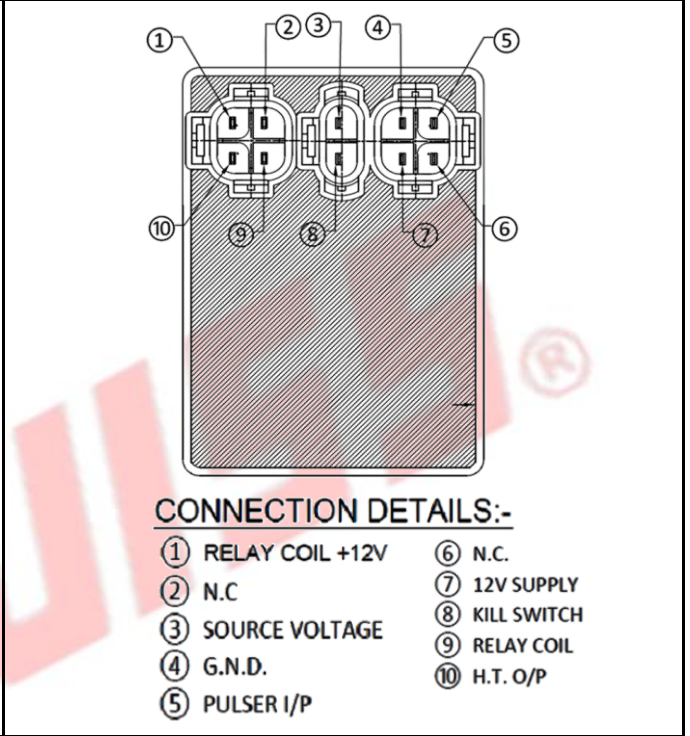

ELECTRICAL SPECIFICATIONS


1	Initial Current Without Firing	Standard
2	Initial Voltage With Firing	230 (±3) VAC
3	Maximum Current	Standard
4	Voltage @ 9000 RPM	218 (±3) VAC
5	Spark Duration	376 μs (min) @ 2500 RPM
6	Firing Start	@ 500 RPM
7	Condenser Capacity (for Ignition)	2.2μf / 275 VAC
8	Max. Angle Change	5° (Ref. Timing Curve)
9	Continous firing upto 10000 RPM	
10	100% Burn-in for 1 hour with peak load at room temperature.	

PART No.	SAP-0671D
PRODUCT	C.D.I


SPECIFICATIONS

PERFORMANCE GRAPHS

TIMING CURVE

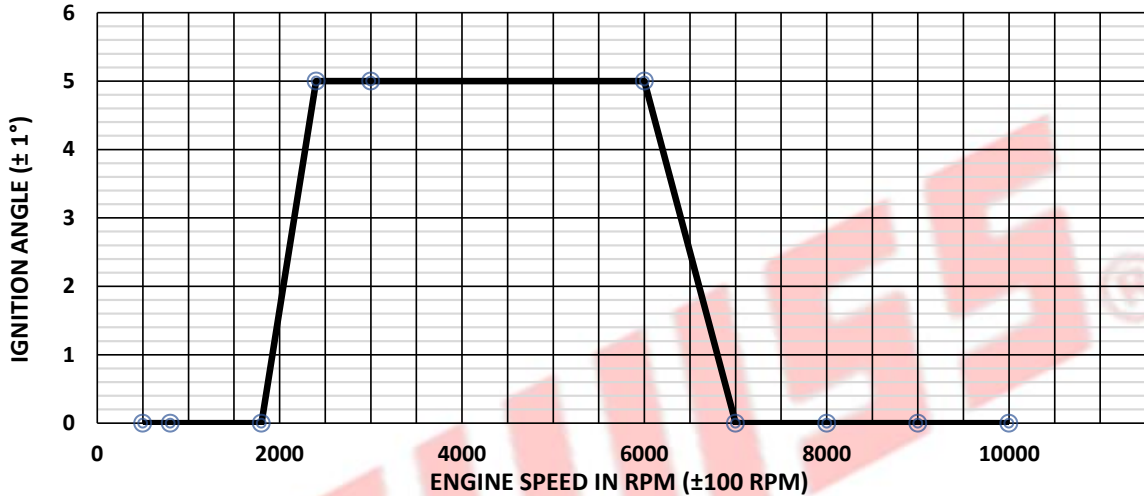

MECHANICAL DRAWING

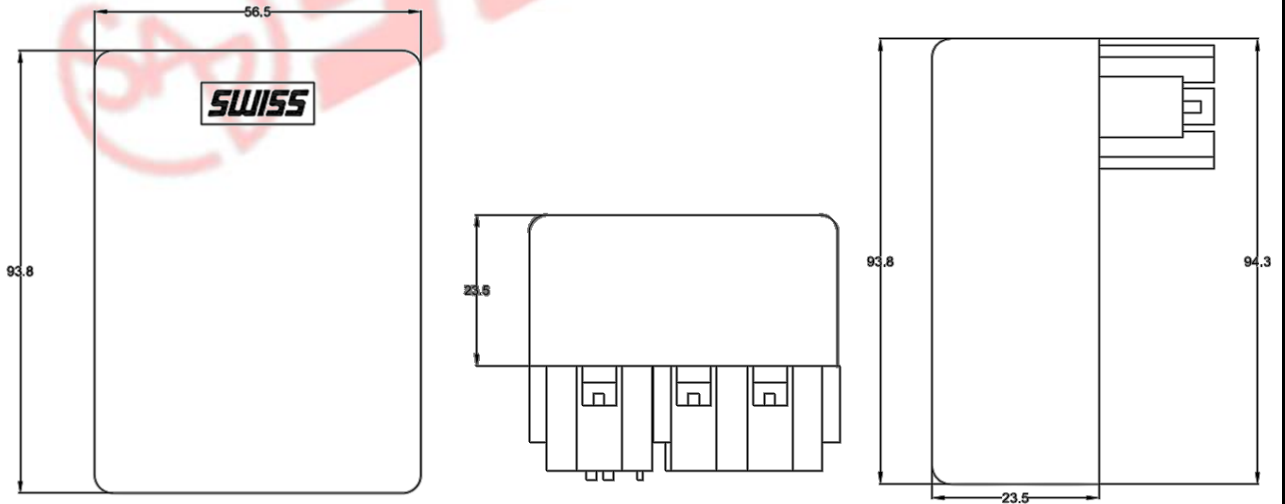

MECHANICAL SPECIFICATION

DIMENSION (mm)	L: 93.8, W: 56.5, H: 23.5
WEIGHT	165 gms
Operating Ambient Temperature Range	-40 °C ~ +80 °C